




Elastomeric cases

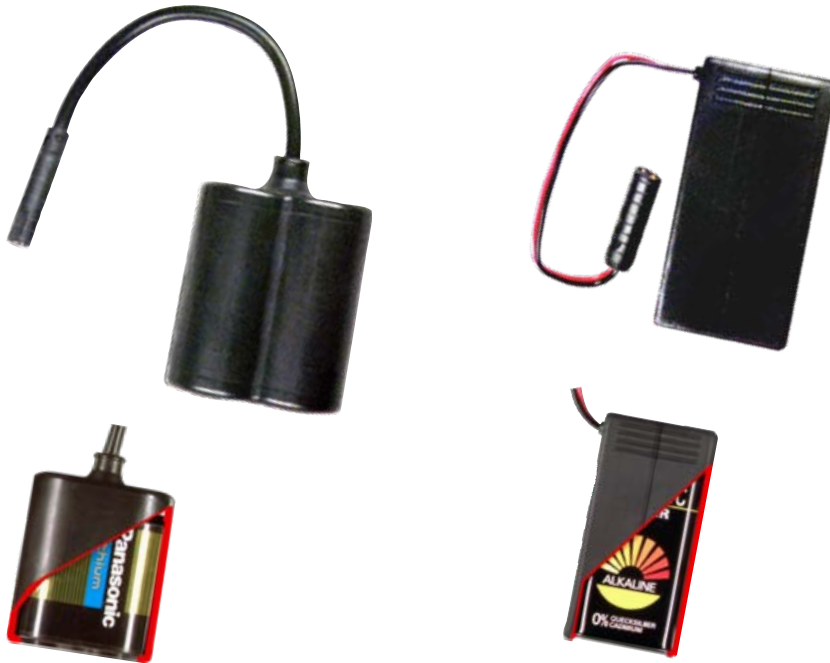

Description

Elastomer battery case to slide in a 6 V lithium or 9 V battery block with moisture protected battery terminals.

Originally developed as an accessory for the bi stable integral cartridge valves of product line 050-... the elastomer battery cases are singly available with twin flex cable of about 125 mm length and round connector by default.

Additionally, the battery casings are suitable for all appliances requiring an independent power supply.

Due to the moisture protection, they can be utilised in a wide range of similar environments.

The PC battery case enables the protection type IP 65.

Applications

- sanitary fittings
- photo and video applications
- model making
- use in moistened areas

Characteristics

- moisture protected battery terminals
- any fitting position
- battery change without tools (not for PC box / ABS box)

PC box




ABS box






Battery Type: CR-P2 6V Lithium

Technical Data

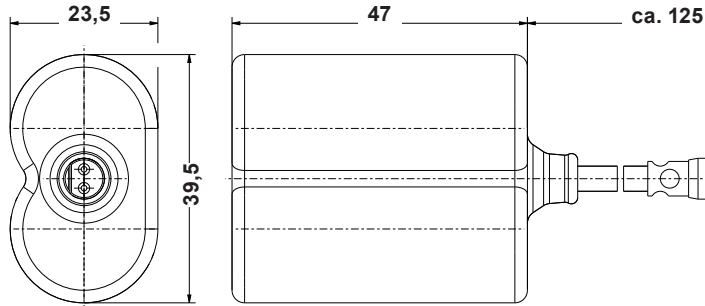


Battery types	6 V CR-P2 lithium 9 V E-block
Construction	elastomer case or plastic housing
Battery terminals	integrated
Cable	Liy 2 x 0,25mm ²
Cable length	125 mm (by default)
Connection	Standard: SC1-F-X e.g. for AKM-IR sensors other connection types on request

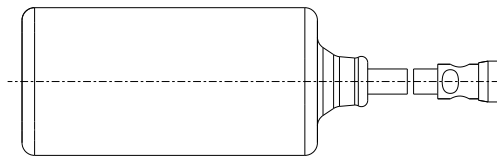



Materials

Battery case 6 V	NBR
Cable insulating	PVC

Contact assignments for all sockets




Battery Type: PP3 9V alkaline

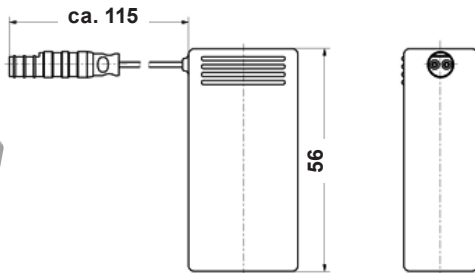

Materials

Battery case 9 V	EPDM
Cable insulating	PVC

Battery Type: PP3 9V alkaline



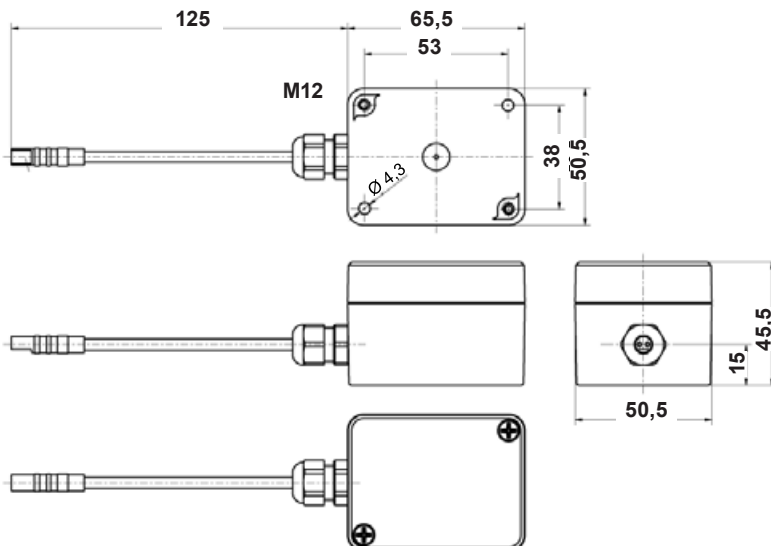


Materials

Battery box 9 V	PC (polycarbonate)
Cable insulating	PVC



Battery Type: CR-P2 6V Lithium

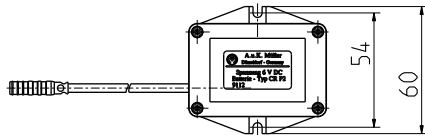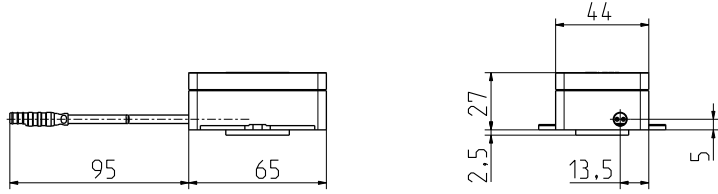

Materials

Battery box 9 V	ABS
Cable insulating	PVC



Solenoid valves
Control valves
Special valves and systems

A. u. K. Müller GmbH & Co. KG
Dresdener Str. 162
D-40595 Düsseldorf/Germany

Tel.: +49(0)211-7391-0
Fax: +49(0)211-7391-281

e-mail: info@akmueller.de
Internet: www.akmueller.de